

Aluminum Coatings


GENERAL

A versatile range of coatings for first and second surface mirrors functioning across a broad wavelength range.

FEATURES

- Suitable for glass, plastic and metal substrates
- Can be deposited on substrates up to 90" (2.3 meters)
- Meets specifications of Mil-M-13508
- Can be cleaned with water, alcohol or acetone

SPECTROMETRIC CHARACTERISTICS

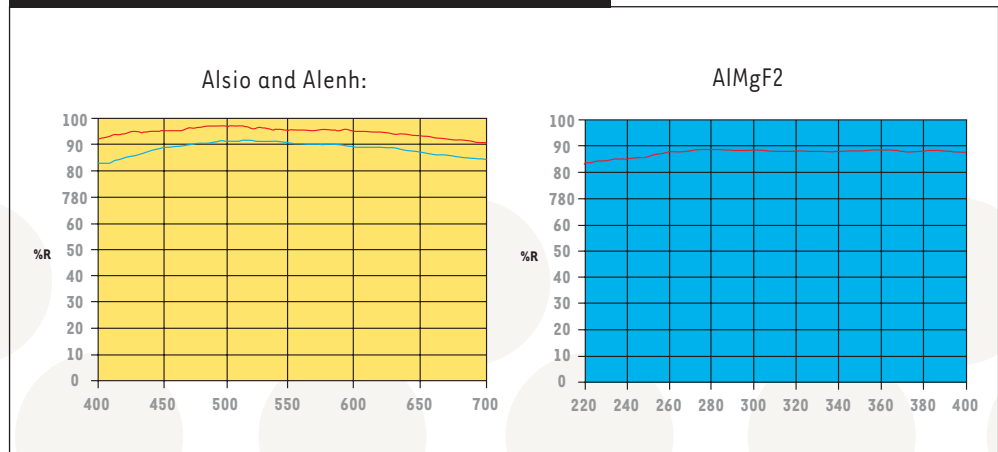

SPECIFICATIONS

Product #	Name	Reflectance	Wavelength	Surface Quality
AlSiO	Protected Aluminum	88% avg.	450-650 nm	80/50, 60/40
AlENH	Enhanced Aluminum	94% avg.	450-650 nm	80/50, 60/40
AlMgF2	UV Protected Aluminum	88% avg.	250-350 nm	80/50, 60/40

Custom design services available. Please call our sales department at 800-456-7070 to discuss your application.